

$V = P^2 + b^2 + h^2$ (spatial)



	Neoprene CR	Polyurethene PU	EPDM	SW
Acetic acid	o	o	+	
Formic acid	o	Δ	+	
Acetone	+	—	+	
Benzene	o	+	—	
Styrene fluid	o	Δ	o	
Butane	Δ	+	—	
Butanol	+	—	+	
Calcium chloride	Δ	+	+	
Chlorine benzole	—	—	++	
Diesel oil	o	+	++	
Acetic acid	75 %	Δ	+	
Formaldehyde	+	+	+	
Fiber 113	o	Δ	—	

Technical Information

The following pages include all the important technical information about our products.

Lactic acid	+	+	+
Mineral oils	o	o	—
Engine oils	o	o	—
Sodium carbonate	Δ	Δ	+
Sodium chloride	+	Δ	+
Sodium hydroxide	50 %	—	+
Soda lye	50 %	—	+
Nitric acid	—	—	10 %
Hydrochloric acid	o	—	+
Lubricating oil	o	Δ	—
Carbon disulphide	—	o	—
Sulphuric acid	50 %	—	10 %
Soap suds	—	+	+
Detergents	o	+	+
Turpentine oil	—	—	—
Hydrocarbon extract	—	—	—
Toluol	—	—	—
Trichloroethane	—	—	—
Water (distilled/river/rain/sea)	+	+	+
Tartaric acid	—	Δ	—
Xylo	—	—	—
Zinc carbonate	Δ	Δ	—



Technical Information | Protection classes

Important: We assume no liability for cited standards!

The degree of protection offered by an enclosure is shown by the letters IP (Ingress Protection) and two indexes. The first index indicates two factors (protection for persons and equipment), the second index indicates only one factor (protection against water).

Example: IP 54

- └ = protection against splashing water
- └ = protection against dust and wire contact with dangerous parts

DIN EN 60529; VDE 0470-1 : 2014-09

First index: Protection against contact and foreign objects

Symbol	Index	Protection against contact		Protection against foreign objects	
		Brief description	Definition	Brief description	Definition
	0	Not protected	–	Not protected	–
	1	Protection against the back of the hand touching dangerous parts	The object probe, a >50 mm diameter sphere, must be at a sufficient distance from dangerous parts	Protection against a solid foreign object of 50 mm or more in diameter	The object probe, a >50 mm diameter sphere, must not fully penetrate
	2	Protection against a finger touching dangerous parts	The test finger, jointed, >12 mm in diameter and 80 mm long, must be at a sufficient distance from dangerous parts	Protection against a solid foreign object of 12.5 mm or more in diameter	Protection against a solid foreign object of 12.5 mm or more in diameter
	3	Protection against a tool touching dangerous parts	The object probe, >2.5 mm in diameter, must not be able to penetrate	Protection against a solid foreign body of 2.5 mm or more in diameter	The object probe, a >2.5 mm diameter sphere, must not penetrate at all
	4	Protection against a wire touching dangerous parts	The object probe, >1.0 mm in diameter, must not be able to penetrate	Protection against a solid foreign object of 1.0 mm or more in diameter	The object probe, a >1.0 mm diameter sphere, must not penetrate at all
	5	Protection against a wire touching dangerous parts	The object probe, 1.0 mm in diameter, must not be able to penetrate	Protection against dust	Dust penetration is not completely prevented ¹⁾
	6	Protection against a wire touching dangerous parts	The object probe, 1.0 mm in diameter, must not be able to penetrate	Dust-tight	No ingress of dust

An enclosure must only be designated with the **first index** (protection against penetration) for a degree of protection when it also meets all lower degrees of protection.











1) Dust must not penetrate in sufficient quantities to prevent the equipment from operating satisfactorily or to impair safety.

Up to index 6, the **second index** (protection against water) must only be used for a degree of protection for an enclosure if it also meets all lower degrees of protection. However, an enclosure which is only designated with the second index 7, 8 (protection against immersion) or 9K (protection against a jet of steam) is considered to be unsuitable for use with a jet of water (index 5 or 6). This means that it does not need to meet the requirements indicated by indexes 5 or 6. Only an enclosure with a double designation meets the requirements regarding resistance to a jet of water and to immersion/jet of steam.

Important note: The degrees of protection given for the enclosures refer to unmachined enclosures as supplied. In the case of protection against water in particular (second index), the test conditions will be met if during the given time for the experiment no water has penetrated, or not in harmful quantities.

The protection classifications do not take into account the effects of ageing and so cannot be guaranteed throughout the lifetime of the enclosure. Additionally, changes in temperature and atmospheric conditions can create loss of pressure in the enclosure, and moisture may be absorbed through the seal area. BOPLA can fit the enclosure with a pressure compensation element for enclosures to be deployed in these environments.

Second index: Protection against water

Symbol	Index	Brief description	Definition
	0	Not protected	–
	1	Protection against falling drops of water	Drops of water falling vertically onto the enclosure must not have any harmful effects.
	2	Protection against falling drops of water when the enclosure is tilted at any angle of up to 15°	Drops of water falling vertically onto the enclosure must not have any harmful effects if the enclosure is tilted at any angle of up to 15° on both sides of the vertical.
	3	Protection against spraying water, spray nozzle: 10 l/min; 5 min	Water sprayed onto the enclosure at an angle of up to 60° on both sides of the vertical must not have any harmful effects.
	4	Protection against splashing water, spray nozzle: 10 l/min; 5 min	Water splashed onto the enclosure from any direction must not have any harmful effects.
	5	Protection against water jets, jet nozzle: 12.5 l/min; 3 min	Water projected in jets against the enclosure from any direction must not have any harmful effects.
	6	Protection against powerful water jets, jet nozzle: 100 l/min; 3 min	Water projected in powerful jets against the enclosure from any direction must not have any harmful effects.
	7	Protection against the effects of temporary immersion in water 1 m; 30 min	Water must not enter in a quantity which results in harmful effects if the enclosure is temporarily immersed in water under standardised pressure and time conditions.
	8	Protection against the effects of continuous immersion in water > IPx7; definition acc. to agreement	
	9	Protection against high water jet temperatures and high water pressure from a flat jet nozzle	Water directed at high pressure and at high temperatures onto the enclosure from any direction must not have any harmful effects.



Technical information | Impact resistance

Important: We assume no liability for cited standards!

The **IK classification** is an international standard which describes suitability for the widest range of ambient conditions. It states how resistant articles such as enclosures are to mechanical stress. The official classification with IK codes of 00 to 10 specifies impact resistance up to a defined minimum level of impact energy which the enclosure must withstand. This code is expressed by means of the letters IK and a two-digit code number.

Example: IK 08

└ = impact energy up to 5 joules

IEC 62262:2002; IEC 60068-2-75:2015

Index: Resistance to mechanical stress

		Resistance to collision and impact	
Symbol	Index	Brief description	Definition
	00	No impact resistance	–
	01-05	Protection against blows with an impact energy of 0.15 joules to 0.7 joules	Defines an impact from a light tool (polyamide)
	06	Protection against blows with an impact energy of up to 1 joule	Defines an impact from a 500 g tool (polyamide) from a distance of 20 cm
	07	Protection against blows with an impact energy of up to 2 joules	Defines an impact from a 500 g tool (steel) from a distance of 40 cm
	08	Protection against blows with an impact energy of up to 5 joules	Defines an impact from a 1.7 kg tool (steel) from a distance of 29.5 cm
	09	Protection against blows with an impact energy of up to 10 joules	Defines an impact from a 5 kg tool (steel) from a distance of 20 cm
	10	Protection against blows with an impact energy of up to 20 joules	Defines an impact from a 5 kg tool (steel) from a distance of 40 cm

Technical information | Flame resistance






Standard 94 of the Underwriters Laboratories (UL94) is accepted worldwide as the predominant standard for classifying the flame retardance of plastics. The procedure according to UL94 is to test the ability of the material to extinguish itself after flaming. The classification is according to the speed of burning and the extinguishing time, droplet formation, and the duration of afterglow time. Depending on the wall thickness, several classifications are possible for each material. The basis for the appropriate specification of a material should correspond to the thickness of the moulding's main wall. Information on the UL 94 classification is only comparable and meaningful if it specifies the relevant wall thickness.

The flammability category always refers to the raw material, tested using ideal test pieces. In the case of manufactured parts, deviations caused by different material thicknesses and the effects of processing are unavoidable.



Quick-Finder:
www.bopla.de/116

Index: Flame retardance of plastics

Symbol	Index	Brief description	Definition												
	HB	The test specimen is held horizontally. For wall thicknesses up to 3 mm, the rate of combustion must be 76 mm/min, and less than 38 mm/min for wall thicknesses of 3 mm.	Often misunderstood: Non-flame-retardant qualities (or materials which are not intended for flame-retardant applications) do not automatically meet horizontal burning criteria. Although the least rigorous, UL 94 HB is a category of flammability and can only be achieved by means of testing.												
	V-2	Test specimen vertical, flame height 20 mm; self-extinguishing up to 30 s after the flame has been removed; no burning droplets; afterglow = max. 60 s.	Cotton wool under the test specimen may ignite.												
	V-1	Test specimen vertical, flame height 20 mm; self-extinguishing up to 10 s after the flame has been removed; no burning droplets; afterglow = max. 60 s.	Cotton wool under the test specimen may not ignite.												
	V-0	Test specimen vertical, flame height 20 mm; self-extinguishing up to 10 s after the flame has been removed; no burning droplets; afterglow = max. 30 s.	Cotton wool under the test specimen may not ignite.												
	V-5	Fire test to determine flammability classes UL 94 5VB and UL 94 5VA. Plastics which comply with at least V0 classification can also be tested; in this case, the flame height is 125 mm.	The process exposes a vertically-mounted specimen 5 times for a period of 5 seconds with pauses of 5 seconds. In addition to the test criteria as per UL 94 V, this flammability test also takes into consideration the formation of holes in panels.												
			<table border="1"> <thead> <tr> <th></th> <th>UL 94 5VB</th> <th>UL 94 5VA</th> </tr> </thead> <tbody> <tr> <td>Afterflame time / afterglow time of the test specimens after the 5th flame application [sec]</td> <td>< 60</td> <td>< 60</td> </tr> <tr> <td>Burning droplets</td> <td>no</td> <td>no</td> </tr> <tr> <td>Hole formation (in panels)</td> <td>no</td> <td>yes</td> </tr> </tbody> </table>		UL 94 5VB	UL 94 5VA	Afterflame time / afterglow time of the test specimens after the 5th flame application [sec]	< 60	< 60	Burning droplets	no	no	Hole formation (in panels)	no	yes
	UL 94 5VB	UL 94 5VA													
Afterflame time / afterglow time of the test specimens after the 5th flame application [sec]	< 60	< 60													
Burning droplets	no	no													
Hole formation (in panels)	no	yes													



Technical information | Plastics

Tolerances on plastics according (DIN 16901)

Deviations from the nominal dimensions are unavoidable in the manufacture of plastic mouldings.

There are various reasons for these deviations:

- a) Processing parameters. These depend on
- the evenness of the moulding compounds
 - the setting of the machine
 - the temperature of the tools
 - the distortion of the tool under pressure.

The tolerances for this standard have been laid down taking into account these factors and numerous measurements in practice.

Nominal measuring range

over	0	1	3	6	10	15	22	30	40	53	70
up to	1	3	6	10	15	22	30	40	53	70	90
A	±0.18	±0.19	±0.20	±0.21	±0.23	±0.25	±0.27	±0.30	±0.34	±0.38	±0.44
B	±0.08	±0.09	±0.10	±0.11	±0.13	±0.15	±0.17	±0.20	±0.24	±0.28	±0.34

over	90	120	160	200	250	315	400	500	630	800	
up to	120	160	200	250	315	400	500	630	800	1000	
A	±0.51	±0.60	±0.70	±0.90	±1.10	±1.30	±1.60	±2.00	±2.50	±3.00	
B	±0.41	±0.50	±0.60	±0.80	±1.00	±1.20	±1.50	±1.90	±2.40	±2.90	

A = Dimensions which are not tool-specific are those formed by the interaction of movable tool parts, e.g. wall thickness, floor thickness or dimensions which are affected by additives or slide bars.

B = Tool-specific dimensions are those in the same part of the tool.

The plastics in this standard are divided into tolerance rows. All the plastics used by BOPLA for standard enclosures are in row 130, for which the tolerances given below apply. The tolerances apply on the basis of the machining shrinkage worked into the tool only for the appropriate enclosure with the standard material stated.

- b) The condition of the tool:
- manufacturing tolerances for tool dimensions
 - wear on tools
 - deviations in the position of movable tool parts.

Information on membrane keypad tolerances:

The installation areas for membrane keypads are dimensioned in the catalogue illustrations (Internet) with the tolerances which are present during manufacture. These tolerances are already restricted in comparison with DIN 16901.

As the membrane dimensions are also furnished with manufacturing tolerances, this may result in undesirable crack dimensions (greatest dimension of enclosure and the smallest dimension of membrane). In the case of membrane keypads developed by BOPLA, this is reduced to a minimum.



The material properties of plastics

Material properties	Unit	Test specification	PS	ABS	PC	SE1 GFN1	PC/ABS-blend	PA6.6 FR	PA6 FR (NV12)	PA6 GF 15	UP-GF
Impact strength + 20 °C	KJ/m ²	ISO 179	-	60	without breaking	30	-	-	without breaking	36	49
Impact strength - 30 °C		DIN 53453	-	40		30	-	-		-	-
Notched impact str. (Charpy) + 20 °C	KJ/m ²	ISO 179	7	10	25	-	-	-	3,5	55	-
Notched impact str. (Charpy) - 30 °C		DIN 53453	4	4	10	-	-	-	-	-	-
Max. bending stress	N/m ²	ISO 178 DIN 53452	-	64	> 70	110	-	-	-	-	> 100
Round body pressure stress	°C	ISO 335-1 DIN 0471/2-5	-	75	125	125	125	-	125	-	-
Retention of shape under heat ¹⁾ A	°C	ISO 75	75	80	125	120	120	90	70	150	150
Retention of shape under heat ¹⁾ B		DIN 53461	-	85	135	130	130	215	10	210	-
Thermal conductivity	W/mK	DIN 52612 ASTM C 177	0.17	0.18	0.2	0.23	-	-	-	-	0.6
Glow hot wire test	°C with mm	ISO 695 DIN 0471/2-1	-	650/2	850/1	960/3,2	960/2	-	850/1	-	-
Combustibility	Grade from mm	UL 94	HB/1.47	HB/1.6	V2/1.14	V1/1.47	V0/1.6	V0/1	V2/1.6	HB/1.6	V0/4
Water absorption	%	ISO 62 DIN 53495 ASTM D 570	< 0.1	0.4	0.35	0.22	-	2.2	2.5	2.2	0.7
Surface resistivity	Ohm	IEC 93	> 10 ¹³	> 10 ¹⁴	> 10 ¹⁵	> 10 ¹⁵	-	> 10 ¹⁵	> 10 ¹²	-	> 10 ¹²
Special volume resistivity	Ohm x cm	IEC 93 DIN 53482 VDE 303 T3 ASTM 27	> 10 ¹⁶	> 10 ¹⁵	> 10 ¹⁶	> 10 ¹⁵	-	> 10 ¹⁵	> 10 ¹⁵	> 10 ¹²	> 10 ¹³
Dielectric strength	KV/mm	IEC 243 DIN EN 53481 VDE 303 T2 ASTM 149	-	-	28	26	-	-	-	-	18

1) The ability of the enclosures to maintain their shape when subject to heat depends on a seal being inserted. The temperature resistance can still be affected by mechanical stress.

All the above data are for guidance only. They have been determined using standardized test pieces and can vary within normal tolerances. The combustibility classification always refers to the raw material, which was tested on ideal test pieces. In the case of manufactured parts, deviations caused by different material thicknesses and the effects of processing are unavoidable.

Outdoor capabilities

BOPLA plastic enclosures qualified for outdoor use are produced from granulates tested for outdoor applications.

The corresponding materials have all been subjected to testing in accordance with the UL746C standard „Polymeric Materials - Use in Electrical Equipment“. This materials testing program also includes artificial weathering:

1. 1000 hours under exposure to xenon-arc weathering
2. Seven-day water immersion test at 70 °C

Prior to and after weathering, the material is tested for all relevant properties, such as flammability, mechanical parameters, etc.. The results of the tests are recorded in two categories on the material's Yellow Card (citation from UL test documentation):

(f1): This footnote indicates that the material meets both the UV and the moisture and immersion-test requirements of UL 746C.

(f2): This footnote indicates that the material has been tested only partially for exposure to UV radiation, moisture and/or underwater conditions or that it has passed these tests only to a restricted extent.

Material characteristics of seals

Test specifications: DIN 53461	Neoprene CR	Polyurethane PU	EPDM	Silicone Si	Perbunan N NBR	TPE
Permitted temperature range	- 30 to + 90 °C	- 40 to + 100 °C	- 35 to + 120 °C	- 60 to + 200 °C	- 35 to + 100 °C	- 40 to + 70 °C

Technical information | Plastics

Chemical resistance of plastics

	PS	ABS	PC	PC/ABS- blend	PA	UP-GF Polyester
Acetone	---	---	---	---	+	---
Formic acid	40 %	---	---	---	---	10 %
Ammonia	+	25 %	---	---	10 %	---
Benzene	---	---	o	---	+	---
Brake fluid	Δ	o	---	---	+	+
Butane	---	+	+	+	+	Δ
Butanol	Δ	Δ	Δ	Δ	+	+
Calcium chloride	+	+	+	Δ	10 %	+
Chlorine benzole	---	---	---	---	+	+
Diesel oil	---	+	o	Δ	+	+
Acetic acid	50 %	25 %	10 %	10 %	5 %	10 %
Formaldehyde	40 %	30 %	Δ	Δ	o	30 %
Frigen 113	Δ	---	+	---	+	+
Fruit juice	Δ	Δ	+	Δ	+	+
Glycerine	+	+	o	Δ	+	+
Heating oil	---	o	o	Δ	+	+
Hydraulic oil	Δ	Δ	+	---	+	+
Caustic potash solution	50 %	50 %	---	---	50 %	---
Potassium chloride	+	Δ	+	Δ	10 %	+
Potassium hydroxide	Δ	Δ	Δ	Δ	Δ	---
Linseed oil	+	+	+	+	+	+
Methanol	Δ	Δ	---	Δ	o	---
Methylene chloride	---	---	---	---	o	---
Lactic acid	80 %	80 %	+	+	o	+
Mineral oils	Δ	Δ	+	Δ	+	+
Engine oils	o	+	+	Δ	+	+
Sodium carbonate	+	+	+	Δ	10 %	+
Sodium chloride	+	+	+	+	---	+
Sodium hydroxide	Δ	+	Δ	Δ	Δ	---
Soda lye	50 %	50 %	---	---	+	40 %
Nitric acid	10 %	---	10 %	Δ	---	10 %
Hydrochloric acid	10 %	o	20 %	Δ	---	---
Lubricating oil	Δ	Δ	+	Δ	+	+
Carbon disulphide	---	---	---	---	+	---
Sulphuric acid	50 %	50 %	50 %	50 %	---	---
Soap suds	Δ	Δ	o	Δ	Δ	+
Detergents	Δ	Δ	+	+	Δ	Δ
Turpentine oil	---	Δ	o	Δ	+	+
Hydrocarbon tetrachloride	---	---	Δ	---	+	+
Toluol	---	---	---	---	+	---
Trichloroethylene	---	---	---	---	+	---
Water (distilled, river, tap, sea)	+	+	+	+	+	+
Tartaric acid	+	+	+	+	10 %	+
Xylol	---	---	---	---	+	+
Zinc sulphate	+	+	+	+	Δ	+
Citric acid	+	+	10 %	+	Δ	+

Symbols

- + resistant to all concentrations °C resistant to this max. °C
- % resistant to this max. percentage concentration
- o resistant under certain conditions
- not resistant
- Δ no information available

Unless otherwise stated, the tests were carried out at room temperature.
If different media coincide, the resistances may change and consequently we cannot accept any liability for these data.



The chemical resistance of seals

	Neoprene CR	Polyure- thene PU	EPDM	Silicone Si	Perbunane N NBR	TPE
Aceton	o	o	+	o	---	---
Formic acid	o	Δ	+	o	Δ	o at 10 %
Ammonia	+	---	+	+	+	+
Benzene	o	+	---	+	o	Δ
Brake fluid	o	Δ	o	+	o	Δ
Butane	Δ	+	---	---	+	Δ
Butanol	+	---	+	Δ	+	Δ
Calcium chloride	Δ	+	+	Δ	+	Δ
Chlorine benzole	---	---	---	---	---	Δ
Diesel oil	o	+	---	o	+	Δ
Acetic acid	75 %	Δ	+	---	---	5 %
Formaldehyde	+	+	+	+	40 %	Δ
Frigen 113	o	Δ	---	Δ	+	Δ
Fruit juice	+	+	+	+	---	+
Glycerine	+	+	+	+	+	+
Heating oil	o	+	---	o	+	Δ
Hydraulic oil	---	+	---	o	o	Δ
Caustic potash solution	+	Δ	+	Δ	o	Δ
Potassium chloride	Δ	Δ	+	+	+	Δ
Potassium hydroxide	+	---	+	o	o	+
Linseed oil	+	+	---	o	+	Δ
Methanol	+	---	+	+	+	Δ
Methylene chloride	---	---	---	---	---	Δ
Lactic acid	+	+	+	Δ	+	o
Mineral oils	o	o	---	+	+	Δ
Engine oils	o	o	---	+	+	Δ
Sodium carbonate	Δ	Δ	+	Δ	+	Δ
Sodium chloride	+	Δ	+	+	+	Δ
Sodium hydroxide	50 %	---	+	o	o	+
Soda lye	50 %	---	+	---	o	50 %
Nitric acid	---	---	10 %	---	---	+
Hydrochloric acid	o	---	+	Δ	---	+
Lubricating oil	o	Δ	---	+	+	Δ
Carbon disulphide	---	o	---	+	---	Δ
Sulphuric acid	50 %	---	20 %	25 %	o	+
Soap suds	---	+	+	+	+	Δ
Detergents	o	+	+	+	+	Δ
Turpentine oil	---	---	---	---	+	Δ
Hydrocarbon tetrachloride	---	---	---	---	---	Δ
Toluol	---	---	---	---	---	Δ
Trichloroethylene	---	---	---	---	---	Δ
Water (distilled, river, tap, sea)	+	+	+	+	+	+
Tartaric acid	o	Δ	+	+	---	Δ
Xylol	---	---	---	---	---	Δ
Zinc sulphate	Δ	Δ	+	+	+	Δ
Citric acid	Δ	Δ	+	+	---	Δ

Symbols

- + resistant to all concentrations °C resistant to this max. °C
- % resistant to this max. percentage concentration
- o resistant under certain conditions
- not resistant
- Δ no information available

Unless otherwise stated, the tests were carried out at room temperature.
If different media coincide, the resistances may change and consequently we cannot accept any liability for these data.



Technical information | Aluminium

Anodisation

Many BOPLA products are based on aluminium profiles and panel materials, and in many cases the metallic look is used as a design feature.

However, an untreated aluminium surface is reactive, and when subjected to ambient influences it can form layers of oxidation and corrosion which can quickly dull the look. Moreover, an untreated aluminium surface is very sensitive to scratches and other mechanical damage.

During anodisation, the surface of the material is chemically converted and – in contrast to other processes – is given a coating. By means of the **Electrolytic Oxidation of Aluminium**, a sealed and mechanically very stable oxide layer (ELOXAL) is created which protects the surface of the material against mechanical damage and corrosion.

Anodised surfaces can be produced in various colours, but perfect reproducibility is not always guaranteed in the case of different manufacturing batches. For this reason, on request we offer only the anodised colour “black” as an alternative to our natural-coloured anodised aluminium surfaces..

Passivation

An anodised surface is the optimal choice for the great majority of enclosure applications, because it protects against mechanical environmental influences. At the same time, it is not conductive. For some applications - especially when, for purposes of EMC screening, enclosure components must be connected conductively to each other – the non-conductive anodised layer interferes with the process or is even unsuitable.

We achieve reliable corrosion protection with a conductive surface by means of chemical passivation designed especially for use with aluminium. The process also results in considerably improved paint adhesion on aluminium. For this reason, we also use low concentration chemical passivation for the pre-treatment of all powder-coated aluminium surfaces.

Our standard powder-coating processes are:

- a) Degreasing
- b) Powder-coating
 - Depth of layer > 50 µm
 - Base: polyester amino-resin
 - Pigment: lead, chromate-free
 - Surface: structured, silicone-free

Our standard lacquering has shown good resistance to chemicals: mineral oils, motor fuels, drilling emulsions, cleaning fluids, weak acids and lyes, weak solvents and weathering. On request, we can also use other lacquers or processes. A different surface structure or gloss can also be obtained.

On principle, always take into consideration that the various aluminium casting processes result in different surface qualities. While die casting gives a smooth, even surface and chill casting results in a slightly grainy surface. This affects special requirements regarding surface quality, e.g. for screen-printing, engraving, etc.

Seawater-resistant version

SBGL: Seawater-resistant primed and lacquered. This version has a special lacquer and the following design:

- Seawater-resistant priming
- 2K - PUR lacquer or as per specification

SWB: This version is powder-coated:

- Polyester powder, silk gloss (fine) / structure (coarser) or as per specification
- Internal parts completely powder-coated

Before being coated to give corrosion protection, these parts are either passivated (Cr(III)-based) or depending on specification and release, yellow-chromated (Cr(VI)-based). These parts also meet the salt spray test according to DIN EN ISO 9227 NSS (1000 hours).

These lacquering processes are only suitable for aluminium parts. Polyester enclosures cannot be supplied in seawater-resistant primed and lacquered (SBGL) or seawater-resistant (SWB) versions because the temperatures needed to burn on the lacquers are too hot for the material.

The properties of aluminium alloys

Properties	Units	GD-Al Si 9 CU 3 (diecasting)	GD-Al Si 12 (diecasting)	GK-Al Si12 (chill casting)	Al Mg Si 0,5 (wrought alloy)
Density	g/cm ³	2.65	2.65	2.65	2.7
App. yielding point	N/mm ²	140	130	80	160
Tensile strength	N/mm ²	240	240	170	215
Ductile yield	%	< 1	1	6	12
Brinell hardness	HB	80	60	55	no inform. avail.
Electr. resistivity	m/Ohm mm ²	no inform. avail.	17 - 27	17 - 27	28 - 34
Therm. conductivity	W/mK	110 - 120	130 - 160	140 - 170	190 - 210
Heat resistance	°C	200	200	200	200
Cold resistance	°C	-100	-100	-100	-100

The chemical resistance of aluminium

	Reaction	Remarks
Acetone	+	
Formic acid	o	
Ammonia	+	
Benzene	+	
Benzole	o	contains no H ₂ O = + contains H ₂ O = o
Drilling oil, cutting oil	+	
Butane	+	
Calcium chloride	+	
Chlorine benzole	+	
Acetic acid	+	
Fat, wax	+	
Formaldehyde	+	free of formic acid
Glycerine	+ ---	contains NaCl = ---
Heating oil	+	
Potassium chloride	o	
Potassium hydroxide	---	
Linseed oil	+	< 250 °C
Methanol	+	
Methylene chloride	+	
Lactic acid	+	
Sodium carbonate	o	

	Reaction	Remarks
Sodium chloride	o	
Sodium hydroxide	+	free of H ₂ when molten
Petroleum	+	
Propane	+	
Nitric acid	+	
Lubricating oil	+	
Soap suds	+	
Carbon disulphide	+	
Sulphuric acid	o	
Hydrocarbon tetrachloride	+	
Toluol	+	
Trichloroethylene	+	light metal tri
Water vapour	+	
Hydrogen	+	
Xylol	+	
Zinc sulphate	o	
Citric acid	+	

Symbols:

- + resistant
- o resistant under certain conditions
- not resistant

Unless otherwise stated, the tests were carried out at room temperature.

If different media coincide, the resistances may change and consequently we cannot accept any liability for these data.

Technical information | Aluminium

Tolerances for pressure die castings (DIN 1688, part 4 : 1986-08)*

Tolerances of dimensions not related to the shape, linear dimensions

(lengths, widths, heights, central distances, diameters, roundings)

Spatial diagonal area ¹	Degree of accuracy	Shape dependency	Nominal measuring range														
			up to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250	over 250 to 315	over 315 to 400	over 400 to 500	over 500 to 630	over 630 to 800	over 800 to 1000	over 1000 to 1250	
up to 180	GTA 13	shape-related	±0.14	±0.17	±0.20	±0.23	±0.27	±0,32									
		non-shape-related	±0.24	±0.27	±0.30	±0.33	±0.37	±0.42									
over 50 to 500	GTA 13/5	shape-related	±0.17	±0.20	±0.25	±0.30	±0.35	±0.40	±0.45	±0.50	±0.55	±0.60					
		non-shape-related	±0.32	±0.35	±0.40	±0,45	±0.50	±0.55	±0.60	±0.65	±0.70	±0.75					
over 180	GTA 14	shape-related	±0.22	±0.26	±0.31	±0.37	±0.44	±0.50	±0.60	±0.65	±0.70	±0.80	±0.90	±1.00	±1.20	±1.30	
		non-shape-related	±0.42	±0,46	±0.51	±0.57	±0.64	±0.70	±0.80	±0.85	±0.90	±1.00	±1.10	±1.20	±1.40	±1.50	
over 500	GTA 14/5	shape-related	±0.25	±0.35	±0.40	±0.45	±0.55	±0.65	±0.75	±0.80	±0.85	±0.95	±1.10	±1.20	±1.40	±1.60	
		non-shape-related	±0.55	±0.65	±0.70	±0.75	±0.85	±0.95	±1.00	±1.10	±1.10	±1.20	±1.40	±1.50	±1.70	±1.90	

Dimensional cast variations for thicknesses


(wall thicknesses, fins, ribs)

Spatial diagonal area ¹	Degree of accuracy	Shape dependency	Nominal measuring range		
			up to 18	over 18 to 30	over 30 to 50
up to 180	GTA 13	shape-related	±0.15	±0.20	±0.20
		non-shape-related	±0.25	±0.30	±0.30
over 50 to 500	GTA 13/5	shape-related	±0.20	±0.25	±0.30
		non-shape-related	±0.35	±0.40	±0.45
over 180	GTA 14	shape-related	±0.25	±0.30	±0.35
		non-shape-related	±0.45	±0.50	±0.55
over 500	GTA 14/5	shape-related	±0.30	±0.40	±0.45
		non-shape-related	±0.55	±0.65	±0.70

1) Determining the spatial diagonal:

The spatial diagonal R is determined by the extreme points of the casting. It is calculated from the nominal dimensions of the prismatic body which delimits the casting whatever its shape.

$$R = \sqrt{l^2 + b^2 + h^2} \text{ (spatial diagonal)}$$

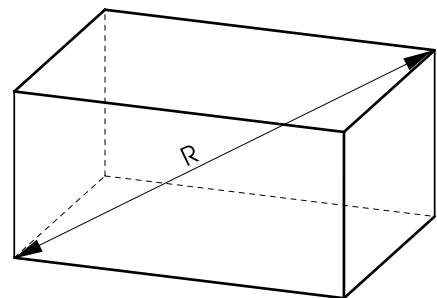

Shape-related dimensions are those in the same parts of the tool. Non-shape-related dimensions are those created by the interaction of movable tool components, e.g. wall thicknesses, base thicknesses and dimensions affected by additives or slides.

* Important: We assume no liability for cited standards!


Tolerances for aluminium profiles (DIN EN 12020-2 : 2001-07)*

Cross-section dimensions

(General information)


The limit deviations of the following dimensions are specified in the corresponding tables.

- A: Wall thicknesses, except for those which enclose the hollow spaces in hollow profiles
- B: Wall thicknesses which enclose the hollow spaces in hollow profiles, except for wall thicknesses between two hollow spaces
- H: All dimensions except for wall thickness
- CD: Circumscribing circle
- L: Profile length



Limit deviations for dimensions other than wall thickness

Dimension H		Limit deviations for H
over	up to	
-	10	±0.15
10	15	±0.20
15	30	±0.25
30	45	±0.30
45	60	±0.40
60	90	±0.45
90	120	±0.60
120	150	±0.80
150	180	±1.0
180	240	±1.2
240	300	±1.5

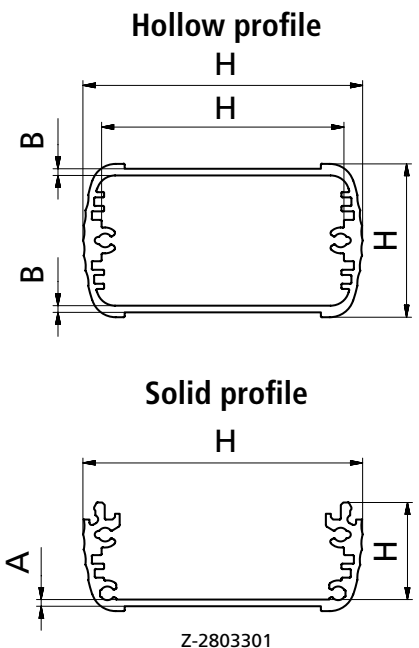

Limit deviations of wall thicknesses

Nominal wall thickness A and B		Limit deviations for			
		Wall thickness A (Circumscribing circle)		Wall thickness B (Circumscribing circle)	
over	up to	CD ≤ 100	100 < CD ≤ 300	CD ≤ 100	100 < CD ≤ 300
-	1.5	±0.15	±0.20	±0.20	±0.30
1.5	3	±0.15	±0.25	±0.25	±0.40
3	6	±0.20	±0.30	±0.40	±0.60
6	10	±0.25	±0.35	±0.60	±0.80

Tolerance for the profile length (cut) $L \pm 0.2$ mm (standard), ± 0.1 mm (on request at an extra charge).

* Important: We assume no liability for cited standards!

All dimensions in mm.



Overview of standards | Defined standards in the 19" sector

Tolerances for processing work and equipment (DIN ISO 2768-m)

We specialise in the processing of enclosures and the integration of electronic components. To do this, we carry out all the necessary work stages on the most up-to-date machines and plant. Our standard tolerances for processing and equipment comply with DIN ISO 2768-m.

Nominal size range

from 0.5 to 3	over 3 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 400	over 400 up to 1000
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8

Overview of standards for 19" products:

Our 19" enclosures comply with a large number of international standards which cover not only mechanical but also electromagnetic compatibility and vibration resistance.

Internal and external dimensions comply with: IEC 60297-3-101 /DIN EN 60297-3-101) / IEEE 1101.1 (subracks and plug-in units)	Refers to product group Intertego (in part sections), Internorm Stil, Interzoll Plus, Internorm (for fitting 19" plug-in units), Interzoll Modul, Interzoll, part front and plug-in front panels, extractor handles (HGS), frame-type plug-in units
IEC 60297-3-102 (DIN EN 60297-3-102) / IEEE 1101.10/11 (injector/extractor handles)	Internorm Stil, Interzoll Modul, extractor handles (HGS)
IEC 60297-3-103 (DIN EN 60297-3-103) (coding and alignment pin)	Internorm Stil, Interzoll Modul, extractor handles (HGS)
Earth conductor connections comply with: DIN EN 50178 / VDE 0160 DIN EN 60950 Teil 1 / VDE 0805 Part 1 DIN EN 61010-1 / VDE 0411 Part 1	Refers to product group Internorm Stil Internorm Stil Internorm Stil
EMC test acc. to: VG 95373 Part 15 IEC 61587-3	Refers to product group Intertego, Internorm Stil Interzoll Modul
Shock and vibration test acc. to: IEC 61587-2 BN 411002 BN 411003 EN 50155 DIN EN 45545-1	Refers to product group Interzoll Modul Interzoll Modul, Interzoll Interzoll Modul Interzoll Modul Interzoll Modul, Internorm Stil
Fire protection behavior acc. to: DIN EN 45545-2	Refers to product group Interzoll Modul, Internorm Stil
For direct screw-type connectors acc. to: IEC 60603-2 (DIN EN 60603-2, formerly: DIN 41612)	Refers to product group Internorm Stil, Interzoll Plus, Interzoll Modul, Interzoll, Intertego, CombiCard 1000-7000
For plug-in units acc. to: IEC 60297-3-101 (DIN EN 60297-3-101)	Refers to product group Internorm Stil, Interzoll Plus, Interzoll Modul, extractor handles (HGS), plug-in front panels, frame-type plug-in units, Interzoll, Intertego, Combi-Card 1000-7000
For plug-in units with insertion and extraction function acc. to: IEC 60297-3-102 (DIN EN 60297-3-102) / IEEE 1101.10/11	Refers to product group Internorm Stil, Interzoll Modul, extractor handles (HGS)
IP classification: DIN EN 60529; VDE 0470-1	Refers to product group Internorm Stil (IP 20), Internorm (IP 54), Interzoll Modul (IP 20), Interzoll (IP 20), Interzoll Plus (IP 20), Intertego (IP 40 / 20 – with ventilation)

Electro-magnetic compatibility

European EMC directive 2004/108/EC was developed within the framework of the standardization of national regulations and has been in force since 20th July 2007. This makes it necessary to submit to EMC tests not only radio equipment but also all electrical and electronic equipment, plants and systems. The purpose of this test is to obtain the awarding of the CE mark which is the pre-condition for the operation of all electrical equipment.

If electro-magnetic compatibility cannot be achieved by means of EMC compatible circuit design and/or metallic internal encapsulation, appropriate measures can be taken in respect of the enclosure. For the choice of an enclosure, this means that an electrical component with EMC can be used in any desired enclosure in 90% of cases without any further work or costs. To achieve shielding, there is no need to sacrifice the essential advantages of plastic enclosures:

- an attractive design
- considerable price savings
- much lighter and more variable

Shielding with plastic enclosures

Plastic enclosures can also be screened effectively without losing the advantages of plastic. Shielding is also achieved by adding a metal coating inside or outside the enclosure.

We prefer to use copper conductive lacquer for reasons of cost and time. In view of the regulations relating to the disposal of electrical scrap, these costs now have to be taken into consideration when calculations are made. Please note that we are unable to take back enclosures which have been specially coated at the customer's request. The aluminium vapour-blasting process is performed in high-vacuum plants. We use a coating of at least 2.5 µm as standard. However, greater thicknesses are possible at any time depending on the enclosure material.

The mechanical properties of the plastic are not altered by the vapourblasting, so no brittleness or tears will result. The new type of copperchrome-nickel coating (CU/Ni/Cr) gives the modular and fully-insulated enclosures an increased level of EMC protection. Coating masks are now available for most of our standard enclosures so that these can be screened at very low cost. In all cases where the procedures described above are not sufficient to provide shielding, the use of contact seals may increase the shielding efficiency. We can recommend or specify these special seals and then deliver them on the basis of customer-specific requirements as well as the type of enclosure used.

Another effective screening measure is to provide an inner metal cap for components, component groups or the entire electronics, if these parts are highly sensitive to radiation interference. This capping can also intensify the screening measures described above.

To complete EMC measures, for cable insertion we supply the appropriate plastic or metal cable glands with the possibility of connecting the cable screening to the enclosure earthing connection. If you require information on the damping values for various BOPLA enclosures with the appropriate screening, please ask for our specific EMC information.

Shielding in the case of aluminium enclosures

Under certain circumstances, the material used for aluminium enclosures may provide some EMC reduction. However, the joints (tongue and groove) need to be fitted with the appropriate conductive seals for optimal EMC applications. Please also note that the lacquer coatings must be bridged. This can be done with the appropriate conductive seals or by removing the lacquer coatings. The amount of work involved must be made clear when the requirements are specified. If necessary, we will give you the addresses of competent contact persons and institutes who will help you with EMC problems. They will carry out the necessary tests and measurements for you and can issue certificates.

IMPORTANT

All technical details are provided to the best of our knowledge but do not release the user from the obligation to test the suitability of these details in respect of the intended processes and purposes.

The customer bears the responsibility with regard to the suitability and use for the intended purpose of our products.

All liability on the part of Bopla Gehäuse Systeme GmbH in connection with technical information of any kind whatsoever is excluded. We reserve the right to optimise products, to change materials and to amend drawings.